

Stone Sizes: 4" to 40"



#904A ASHLAR STONE

Architectural concrete surface treatment shall be obtained with Architectural Polymers® elastomeric form liner as manufactured by Architectural Polymers®. Release agent shall be approved and applied as per Architectural Polymers® recommendation. Factory bonded 1/2" plywood is also available. No substitutions will be allowed without prior written approval from the architect or engineer.

#904A Ashlar Stone
Short Form Specification



©2014 Architectural Polymers Inc. All rights reserved.

1220 Little Gap Road • Palmerton, PA 18071 • PH: 610-824-3322 • FAX: 610-824-3777 • www.apformliner.com

PREPARED FOR:



SHOP DRAWING REVIEW



ENGINEER'S REVIEW		RESPONSE REQUIRED OF CONTRACTOR	
APPROVED <input checked="" type="checkbox"/>	REJECTED <input type="checkbox"/>	RESUBMIT <input type="checkbox"/>	
APPROVED AS NOTED <input type="checkbox"/>	COMMENTS ATTACHED <input type="checkbox"/>	CONFIRM <input type="checkbox"/>	

ENGINEER'S REVIEW IS FOR GENERAL CONFORMANCE WITH THE DESIGN CONCEPT AND CONTRACT DOCUMENTS. MARKINGS OR COMMENTS SHALL NOT BE CONSTRUED AS RELIEVING THE CONTRACTOR FROM COMPLIANCE WITH THE PROJECT PLANS AND SPECIFICATIONS, NOR DEPARTURES THEREFROM. THE CONTRACTOR REMAINS RESPONSIBLE FOR DETAILS AND ACCURACY, FOR CONFIRMING AND CORRELATING ALL QUANTITIES AND DIMENSIONS, FOR SELECTING FABRICATION PROCESSES, FOR TECHNIQUES OF ASSEMBLY, AND FOR PERFORMING HIS WORK IN A SAFE MANNER.

ATLAS TECHNICAL CONSULTANTS

BY SWW

DATE 03-25-22

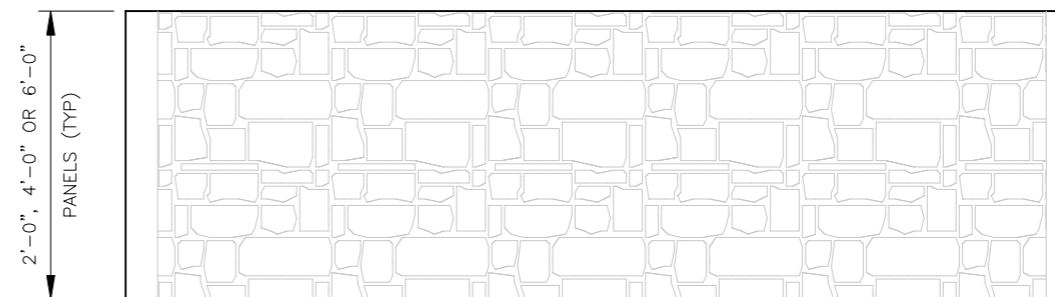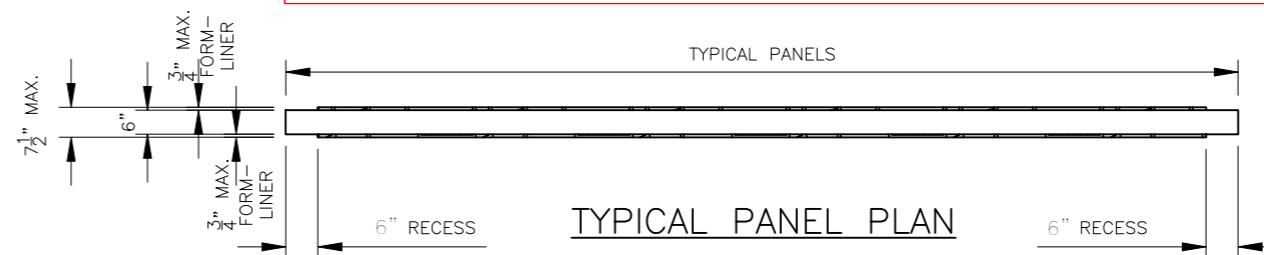

TYPICAL PANEL ELEVATION

DATE: Mar 30, 2022

Approved in general. Details not checked. This approval shall not relieve the Contractor of any responsibility for conformity with the contract Plans and Specifications.

Georgia DOT
Office of Bridge Design
By: EMH